


# Connection types for transport belts


Besides the endless woven transport belts we supply custom made PTFE transport belt produced with the PTFE coated glass fabric and type of connection you choose. The following drawings are meant as suggestions. If you require different types please do not hesitate to send us your enquiry with drawing or sample.

The most commonly used connection is the overlap connection where the two edges simply overlap. If you face problems with the step in the belt you may wish to have it grinded. The width of the overlap connection can be selected. Usually it is either 15 mm, 25 mm or 50 mm wide.

## 25 mm overlap connection

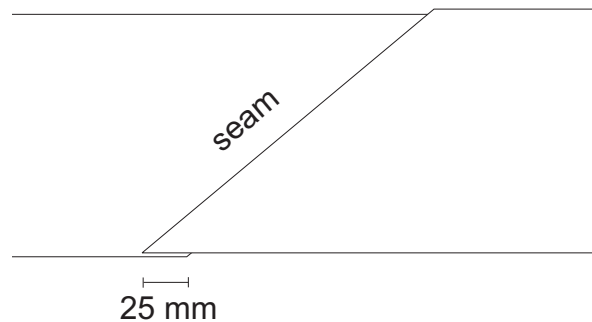

## 50 mm overlap connection

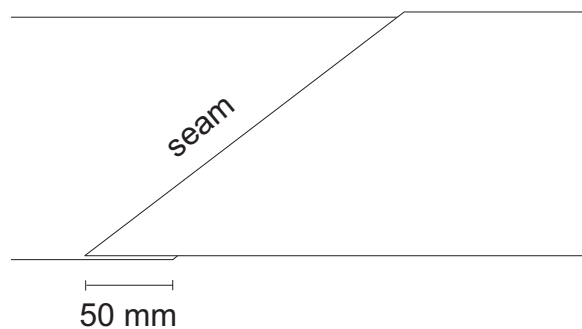

### Common overlap connection



### HS overlap connection - one side grinded



### FS overlap connection - both sides grinded



Grinding the overlap connection makes the seam smooth and almost invisible.